


PRE-WIRED LOAD CENTERS

Load centers are pre-wired from the circuit breaker out for branch wiring. Homeruns for each circuit are pre-cut to length and terminated in panel. Conductors are labeled with circuit numbers for easy identification during installation. All cables come neatly coiled and zip-tied to the optional panel bracket.

Features and Benefits



Non-Metallic Cable

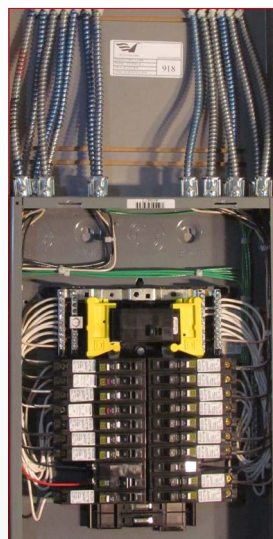

Metallic Cable

- Available in metallic or non-metallic cable
- Cables pre-cut to length with circuit I.D.
- Built and labeled to project specifications and panel schedule
- Optional panel bracket sets panel flush with 5/8" sheetrock
- Manufactured in a controlled factory environment
- UL Listed wiring assemblies (UL File No. 95149)
- IBEW / USA



For more info visit atkore.com/acsunifab 